



Blades

- Hårkansson Standard Suitable for both soft and Hardwood
- Ripper 37™ Longer life blade suitable for Hardwood
- Hårkansson HSS Very long life blade 3 – 4 times the normal blade. Suitable for all types of wood including very hard woods



Trailer package with support legs

Tow your LumberLite LM29 on highways behind a pickup* and through the woodlot right to your milling site behind an ATV or pickup. When you get there, quickly and solidly level the log deck with the adjustable support outriggers. Package includes a sub-frame that rigidly and solidly supports both the log deck and trailer system components. It also includes a solid 1400 pound-rated single axle, 12" wheels, highway running-lights and wiring harness, safety chains, 2" (50mm) coupler and 8 support legs. Note: Maximum of one 4-foot bed extension recommended on trailer-equipped model. (Item No. ML26-41150) Add an additional sub-frame section and pair of support legs. (Item No. ML26-41150-B) to support additional 4-foot bed extension



4-Foot Bed Extension

Increase your cutting length – add one or more optional 4-ft (1.2m) bed extension. Additional log rest/dog clamping assemblies sold separately. (Item No. ML24-41130)



Lap Siding and Shingle Making Package


Make shiplap and cedar-shake siding quickly and easily. With this unique jig, cut lap-siding 7" – 12" (17.5 – 30cm) wide, with taper widths down to a feather-edge. Reconfigure the jigs and make cedar-shake shingles 7" – 12" (17.5 – 30cm) wide and up to 20" (50cm) long – Each pass makes two shingles. Two jigs per set. (Item No. 41270)



Saw Carriage Cover

Protect your investment. Made from the same rugged material used for transport-truck covers – they're rip, rot and UV-resistant. Tailored specifically for the LumberLite LM29 to fit snugly over the whole carriage and equipped with draw-cords. (Item No. ML24-41290)



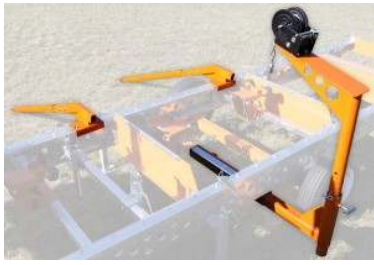

Log Loading/Rolling and Ramp Package

Load and roll logs onto your LM29 easier and more securely. Pass the winch cable over and around the log, connect it to the log deck frame and operate the winch – the log rolls up the ramps onto the bed. It also makes rolling (rotating) the log on the bed a snap, and holds the log firmly for dogging. Enables one person to operate the sawmill alone easily. Package includes two loading ramps, a 2-speed 1800 lb. winch, mast/boom and receiver and log-rolling hook. (Item No. ML26-41400)



Toe Boards

Trees are wider at the butt making it hard to mill true lumber parallel to the heart of the log. Shimming is time-consuming hard work. Compensate for taper to mill true, high-value lumber fast and easy. Choose the perfect height for each log thanks to the manual hydraulic bottle jack. Steel rollers make repositioning the log lengthwise along the bed easy. Two toe board units per set. Note: Image of toe boards mounted on LM Pro shown. (Item No. ML26-41285)



Auto-Lube Kit

Automate the blade lubrication system on your LM29. Water automatically flows when you activate the throttle, and stops when you release. Saves two operator functions for each board you cut. (Item No. MILL-WLKIT)



Board Offloaders

Offload lumber fast and easy with a set of board offloaders. Push the fresh-sawn board or slab onto the bunk-mounted rollers and shoot it down to the end of the bed for fast, efficient unloading and stacking. Quickly retractable so there's zero interference when milling oversized logs and cants. Four roller assemblies per set. (Item No. 41287)



Cam Dog

Ideal for instant clamping of squared cants and boards with a quick push of the handle. Use the standard log dog to clamp your log in the round and the cam dog to clamp squared beams and lumber. The pick's blunt-nose design reduces marring of your valuable lumber. Clamp as low as $\frac{3}{4}$ " above bunk height. (Item No. ML26-CD01)





Dura-Guide™ Ceramic Blade Guides

Originally designed for the Norwood Pro, LumberLite LM29 owners can now also benefit from the improved performance delivered by Norwood's patented ceramic guides. The Dura-Guides deliver full 3-sided support to maximize stability in the cut. The ceramics are more durable than rollers & bearings, they run cooler and virtually silent, and are less affected by sawdust build-up and freezing. And, because they eliminate blade deflection and down-pressure, they help extend blade life. Kit includes a pair of precision-machined patented ceramic blade guide blocks and shafts, a complete set of ceramic inserts, a template and all hardware. (Item No. MILL-BGCRK)

Lumberlite log dog – log rest package

Three-function log rests are included on the LumberLite LM29 – hold log off to compensate for knots, or spin to expose angled top for easier log-roller, or spin to engage 90-degree cant/board rest surface. Required if extending the bed length.



Rapid-Dogging and Rolling System

If you mill mainly small to mid-sized sawlogs 6" – 16" (15 – 40cm) in diameter, this patented dogging and rolling system is engineered to save you time and hassle. You'll find your sawlog is easy to turn – even by hand! Dogging is lightning fast thanks to the one-handed, single-action log dog clamps designed specifically to handle mid-size dimension logs. Two units per set. Note: Image of rapid-dogging/rolling units mounted on LM Pro shown. (Item No. 41295)



Cant Hook (Short)

Designed to turn and roll logs while on the mill. At only 30" (75cm) long, this cant hook is nimble and easy to handle. Grips 8" – 32" (20cm – 80cm) diameter logs. Item No. MS030

Cant Hook (Long)

Extra solid construction, conical handle socket and extended handle spring, forged hook with triangular, polished tip, including ash handle. 130 cm long.





Peavey Hook

Indispensable for rolling logs around the woodlot and onto the mill. Jab the peavey point into the ground to gain extra torque for log rolling. 42" (105cm) handle gives good leverage without being cumbersome. Grips 8" – 32" (20cm – 80cm) diameter logs. Item No. PV042



Blade sharpener

Quality lumber and saw blade life depend on a sharp blade therefore make it convenient for yourself and own your own sharpener.

The Logosol Grindlux sharpens your bandsaw blades completely automatically. A feeder arm feeds the blade forwards and a clamp, which is fitted to the blade, turns the machine off when the blade has been sharpened one turn. The machine can be adjusted for tooth rake angle, gullet depth and take off.

Taking care of the bandsaw blades is important. They will last longer if you change blade after having cut 10-20 logs, and then recondition the blade you have used. Start with cleaning and rust protecting the blade with universal oil. Naturally, the cutting teeth must be kept sharp, but it is just as important to grind the gullets, where small cracks can occur in the material. When the cracks are ground off and the teeth are sharp again, the blade should rest at least one day in order to let the steel recover. After that, the blade is like new again. If you grind off 0.1 mm (1/128") every time you sharpen the blade, you can sharpen it approx. 10 times.



Manual toe board

Quickly compensate for log taper and mill true with this simple and cost effective tool. The toe board can also be used as a cant hook.

